


NPFSR-K122AMD

GE G

2NO+2NC

U ₁	24V AC/DC
U ₂	0.85 ~ 1.1
f	50Hz ~ 60Hz
P ₁	2.2W/24V DC, 5.4VA/24V AC
I ₁	50mA/24V DC
n	15
PNP	PNP
2NO+2NC	2NO+2NC
AgSnO ₂ +0.2μmAu	AgSnO ₂ +0.2μmAu
AC-15: 5A/230V, DC-13: 5A/24V	AC-15: 5A/230V, DC-13: 5A/24V
10A gL/gG(NO), 6A gL/gG(NC)	10A gL/gG(NO), 6A gL/gG(NC)
t _{ON}	: 300ms, : 150ms
t _{OFF}	: 30ms, : 100ms
t _{REPEAT}	: 30ms, : 100ms
t _{COOL}	20ms
IEC/EN 60947, IEC 61326-3-1, IEC/EN 61000-6-2, IEC/EN 61000-6-4	IEC/EN 60947, IEC 61326-3-1, IEC/EN 61000-6-2, IEC/EN 61000-6-4
250V AC	250V AC
6000V(1.2/50us)	6000V(1.2/50us)
1500V AC, 1 min	1500V AC, 1 min
IEC 60947-1	IEC 60947-1
10Hz ~ 55Hz, 0.35mm	10Hz ~ 55Hz, 0.35mm
III	III
2	2
IP20	IP20
-20°C ~ +60°C	-20°C ~ +60°C
-40°C ~ +80°C	-40°C ~ +80°C
2000 m	2000 m
10×10 ⁶ cycles	10×10 ⁶ cycles

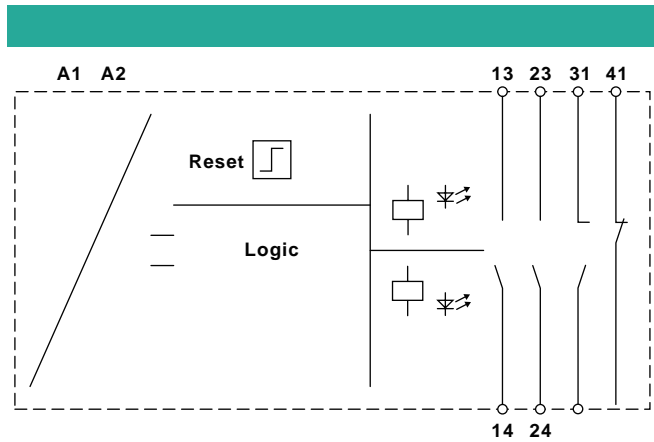

PLe,	ISO 13849
Cat.4,	ISO 13849
20 ,	ISO 13849
99%,	ISO 13849
164 ,	ISO 13849
68,	ISO 13849
SIL3,	IEC 61508
SIL CL3,	IEC 62061
1,	IEC 62061
99%,	IEC 62061
1.29×10 ⁻⁵ /PTI=20	IEC 62061
1.49×10 ⁻¹⁰ 1/h,	IEC 62061
0,	IEC 60204